













IC-5170SC

Smart Full HD Wi-Fi

Smart Home Connect Kit

Intelligent Security See and sense changes in your environment



Panoramic View Wider and more



video quality

detailed views



Battery Powered Batteries included with low power alert



Push notifications when events are triggered

Smart Home Connect Kit

The IC-5170SC integrates a Full HD Wi-Fi fisheye camera with two door/window sensors, one PIR heat-based motion sensor and a temperature & humidity sensor. It can see, sense & secure your property and instantly show you real-time status and events around your house on your smartphone. And with the free EdiLife app, any activity at home can be monitored when you're not there. The IC-5170SC is simply the best all-in-one Smart Home Sensor Kit you're looking for.







Cover Everything with Intelligent


Security

Offering wider angle views than conventional Wi-Fi cameras, the IC-5170SC's fisheye camera can cover your front door, garage or a whole room without surveillance blind spots. Compared with installations of other cameras on the market, the IC-5170SC not only slashes the cost of devices, storage space and bandwidth – but provides more convenience to work with multiple environment sensors to watch and secure your properties at the same time. It's effective regardless of whether you're living in a small apartment or a mansion.

- 180-Degree Panoramic View.
- 1920 x 1080 Full HD video quality from your house.
- ePTZ digital pan, tilt & zoom for rich detail.

Affordable Home Automation.

No Installation Costs. No Monthly Fees. No Subscription Required.

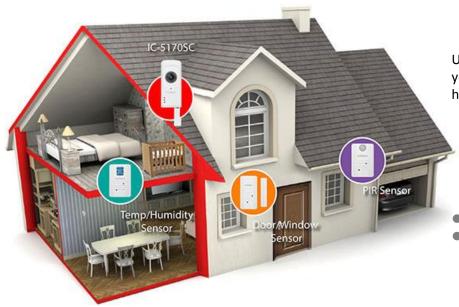

Universal compatibility with any Wi-Fi router so you don't have to install another home center or hub to manage your smart devices. Easily attach the sensors and connect to the gateway automatically, and let the free EdiLife app take care of the rest. Remote-monitoring, accurate detections of environment changes and instant notifications and alerts.

- Works over your Wi-Fi network.
- Integrated with 2.4G RF multi-function sensors.



Door & Window Sensors


Instant Alerts When Doors and Windows are Open or Closed

Built-in reed switch works with 2.4G RF and connects to your existing home Wi-Fi network, with a slim design that's ideal for narrow jamb doors and windows. Make sure your doors and windows are shut so that pets can't escape and valuables are safe or you can even use the sensors on closet doors and drawers.

With the convenience of the IC-5170SC you'll be informed with video alerts when your loved ones arrive or leave home. No worries about leaving a back door ajar or the side windows open at night, and get immediate warnings when the door or windows are opened by exterior forces.

- Instant video alerts.
- Slim design to fit narrow jamb doors and windows.



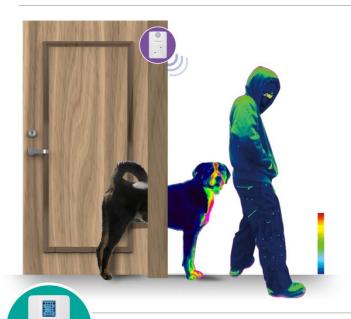

PIR Sensor

For Accurate & Automatic Detection

The Passive Infrared (PIR) Sensor is a highly precise sensor that detects motion via infrared radiation caused by temperature changes – such as when a person or animal passes by – and sends push notification to your smartphone. It's designed to protect your house from intruders and avoid false alerts from movement such as shadows, street lights or branches swaying in the breeze.

Automatically detect infrared events with high precision.

Temperature & Humidity Sensor Make Your Home More Comfortable.

The IC-5170SC's dual temperature and humidity sensor keeps you aware of micro climate changes in your environment. People often receive daily weather reports to choose clothes for warm or cold weather outside but don't know much about indoor conditions. With better



awareness of temperature and humidity levels inside, you can be much more comfortable at home and prevent family from discomfort or health issues caused by dry air or moisture problems. An indoor sensor is an excellent tool to monitor and manage the temperature and humidity inside your home.

The sensor can also be easily fitted into any space where temperature and humidity levels are important to prevent damage to items. You can protect plants, leather, toys and computer, communications or consumer electronics from excessive heat, cold or humidity with the remote monitoring and alerts capability of the sensor.

- Transmits temperature and humidity information wirelessly.
- Automatic alerts to inform you when temperature or humidity degrees exceed or below your setting.

IC-5170SC



One App for Everything


Works with the free EdiLife app to provide live views and real-time notifications of events triggered by the multienvironment sensors. In addition, EdiLife offers a range of other benefits such as push notifications, video and events logs, and more. Now available for Android and iOS.



Flexible Storage Options

Recordings from the IC-5170SC can be saved directly to microSD, SDHC, NAS, – flexible options for you to save video on the local storage.

Wherever there's an Internet connection you can always connect with the IC-5170SC using your smartphone.

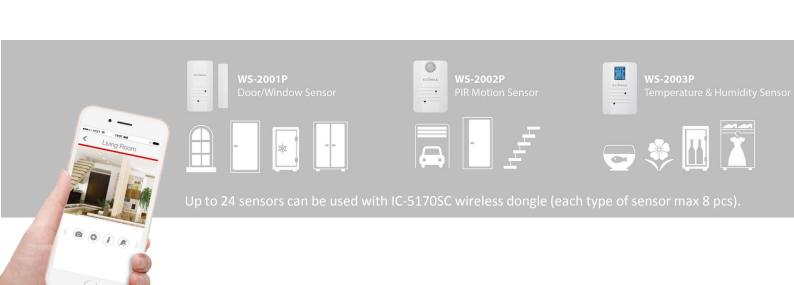




Unparalleled Ease of Installation and Use



Interface Diagram

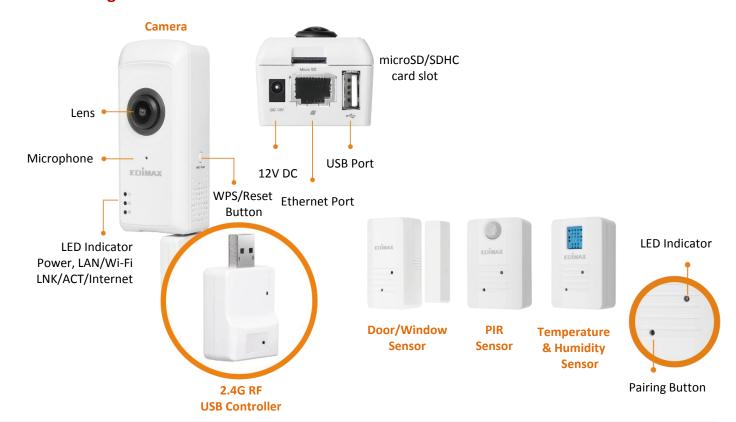

Sensor Efficiency

- Effective wireless connection within 80 meters open space.
- PIR detection distance: 3 meters
- Temperature range: 0 50°C
- Humidity range: 20% 90% RH

Batteries Included

- AAA battery powered for sensors.
- 10 Zinc Carbon batteries included.







Specifications

| C-517 | 'NSC | Smart | Home | Conne | ct Kit |
|-------|------|-------|------|-------|--------|
| | | | | | |

| IC-5170SC Smart Home Connect Kit | | | | | |
|----------------------------------|---|--|--|--|--|
| Dimensions | Camera: 131.57 mm(H) x 40.8mm(W) x 39.32mm(D) Door/Window Sensor: 66 x 33.6 x 25 mm PIR Motion Sensor: 66 x 44 x 25 mm Temperature & Humidity Sensor: 66 x 44 x 25 mm | | | | |
| Camera | Min Illumination: 1.0 Lux Sensor: 1/3" CMOS, 3M pixels Lens: 1.30mm / F2.5 Viewing Angle: Panoramic 180 degrees (H), 142 degrees (V) & 206 degrees (D) Zoom: 4x Digital | | | | |
| Connectivity | IEEE 802.3/802.3u, IEEE 802.11 b/g/n, 1 internal Wi-Fi antenna 2.4G RF | | | | |
| Video | H.264 & M-JPEG dual coded video compression Max Resolution: 1920*1080 1080P (H.264), 1280*720 720P (M-JPEG) Frame rate: 30fps (1080P/720P/VGA/QVGA) | | | | |
| Audio | Built-in microphone | | | | |
| Management | EdiLife: free mobile app for iPhone, iPad & Android EdiView Finder: web management interface fro Windows/Mac 16-channel viewer Firmware upgradable | | | | |
| | | | | | |

| Power | Camera: 12V DC/1A |
|-------|---|
| | Sensors: AAA batteries. |

| Sensor Model Name & | WS-2001P Wireless Door/Window Sensors | WS-2002P Wireless PIR Motion Sensor | WS-2003P Wireless Temperature & Humidity Sensor |
|------------------------|---|---|---|
| Efficiency | Operating range - up to 40 meters indoor | Operating range - up to 40 meters indoor Coverage angle: 110° Detect distance: 3 meters | Operating range - up to 40 meters indoor Temperature range: 0 - 50°C Humidity range: 20% - 90% RH |

• Supports 64G microSD/SDHC card slot for local storage.

Up to 24 sensors can be used with IC-5170SC wireless dongle (each type of sensor max 8pcs).

Motion & sound detection trigger recording and alerts to microSD/SDHC card, email and FTP

Operating Conditions

Features

• 0-40°C









EdiLife App More Info

Copyright © 2017 Edimax Technology Co. Ltd. All rights reserved.

^{*}Actual viewing resolution and frame rate of network cameras depend on connection speed.

^{*}Maximum performance, actual data rates, and coverage will vary depending on network conditions and environmental factors. Product specifications and design are subject to change without notice.